

FREWITT 

FLEXMILL

CC-3 & CC-6



WE
CARE
ABOUT
MILLING

WWW.FREWITT.COM



This technology is patented and owned by Frewitt. Any infringement of our rights will be subject to immediate legal action.

FLEXMILL CRUSHER CC-3 & CC-6



The concept behind the FlexMill Crusher allows for the machine to be easily converted from an oscillating mill to a crusher for products with an input size between 3-15 cm, reducing them to pieces of 1-2 cm. An intelligent system integrated into the mill allows the rotor to reverse if the rotor becomes blocked. This function prevents an amperage overload of the system and ensures a continuous process without the machine shutting down.

After crushing the product, the operator can remove the crusher tool element, replacing it with OscilloWitt tools, hence reducing a product from up to 5 cm to a final size of 250 μm , with a single machine, specially designed to mill, as well as deagglomerate heat-sensitive and difficult-to-process products.

SUITABLE FOR THE FOLLOWING INDUSTRIES:



Pharmaceutical



Battery



Chemical



Food

PROCESS CHARACTERISTICS




Throughput

Crusher CC-3: up to 650 kg/h*
Crusher CC-6: up to 1000 kg/h*



Particle size range
down to 1cm



Product temperature range
-20°C to +60°C



Product density
up to 2 kg/dm³

*The flow rate depends on product characteristics and particle size

ADVANTAGES

- A very broad spectrum of applications for any type of dry, moist (not sticky), hard, cryogenized or heat-sensitive powder
- Extreme production flexibility due to a unique modular concept which allows quick tool interchange
- Clear GMP-capable concept for smooth, reproducible production
- High production safety offering the ATEX-certified concept for zones 0/20 down to an MIE of > 1mJ
- Reduced operational costs due to the unique oscillating and crushing modular concept
- Simple and fast to clean; Washing-in-Place (WIP) available as option
- Reduced energy consumption
- Versatile use is made possible by a large selection of tooling elements



CC-3

CC-6



TECHNICAL CHARACTERISTICS



Materials

AISI 316/316L - $R_a \leq 0.8 \mu\text{m}$
 AISI 304/304L - $R_a \leq 1.4 \mu\text{m}$
 EPDM/PTFE/Silicone

Interior
 Exterior
 In product
 contact,
 certified FDA

EXECUTIONS



Standard

ATEX certified for zones
 0/20 down to an MIE of >
 1mJ





Optional

WIP



Dimensions & weight

Length (CC-3)	1299 mm
Length (CC-6)	1343 mm
Width	860 mm
Height	1417 mm

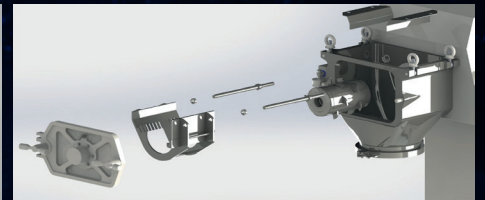



WORLDWIDE PRESENCE



FREWITT HEADQUARTERS

Frewitt manufacturer of machines Ltd.

Route du Coteau 7
1763 Granges-Paccot
Switzerland

Postal address

P.O. Box
1701 Fribourg
Switzerland

P: +41 26 460 74 00
info@frewitt.com
www.frewitt.com

**Frewitt Pharma Machinery
(China) Co. Ltd.**

1029 Shenfu Road,
Xinzhuang Industrial Zone
201108 Shanghai
China

P: +86 21 548 32950
info@frewitt-china.cn
www.frewitt-china.cn

Frewitt USA, Inc.

249 Homestead Road,
Building 5, Unit 8
Hillsborough, NJ 08844
USA

P: +1 908 829 5245
info@frewitt-usa.com
www.frewitt-usa.com